



**Insert
Kyle Ride
Height
Tool into
the frame
on the left
side of the
bike.**




Find a suitable way to securely hold the bike in place without using the rear wheel.

Gently raise the bike until the rear wheel clears the ground. We have carefully used a floor jack with a rubber lift pad, positioned under the



exhaust
header.

Measure
from the
top of the
Kyle Ride
Height
Tool to the
center of
the rear
axle and
adjust the
ride
height to
235mm
+/-5mm

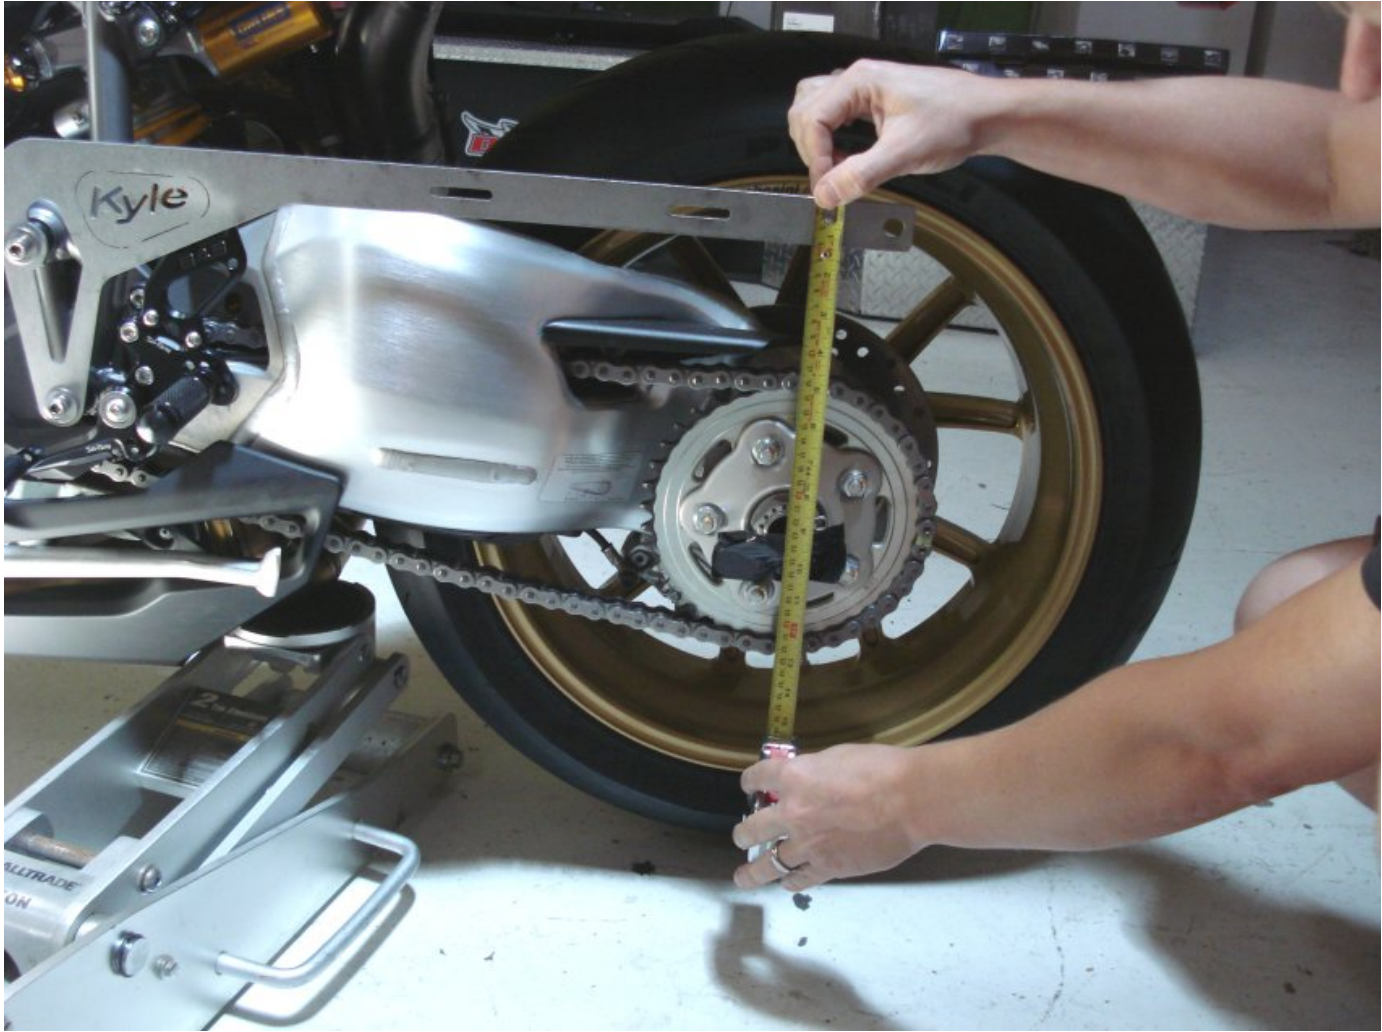

The 848 does not come with an adjustable rod so we have used one from Sato Racing

