

# 【SERVICE RESET】 2016 DUCATI MULTISTRADA 1200 SERVICE LAMP RESET

Release time:

2021-03-15

## Maintenance Tips

**Maintenance Tips:** There is a 2016 DUCATI MULTISTRADA 1200, Reached the maintenance time, the dashboard occurs "DATE SERVICE".



## Precautions

**Precautions:** After finishing the relevant maintenance, you can eliminate the maintenance reminders according to the following methods.

## Solutions


**Tool Required:** MS80、M001/M001A、M037

**Solutions:** By using MS80, operate **【Annual maintenance warning light off】** , to eliminate the reminder.


### Detailed Steps:

①Using MS80, enter DUCATI, click **【Select from vehicle】** ;

Tips: If MS80 connected to motorcycle, can select **【Auto Identify[VIN]】** to enter the correct menu;

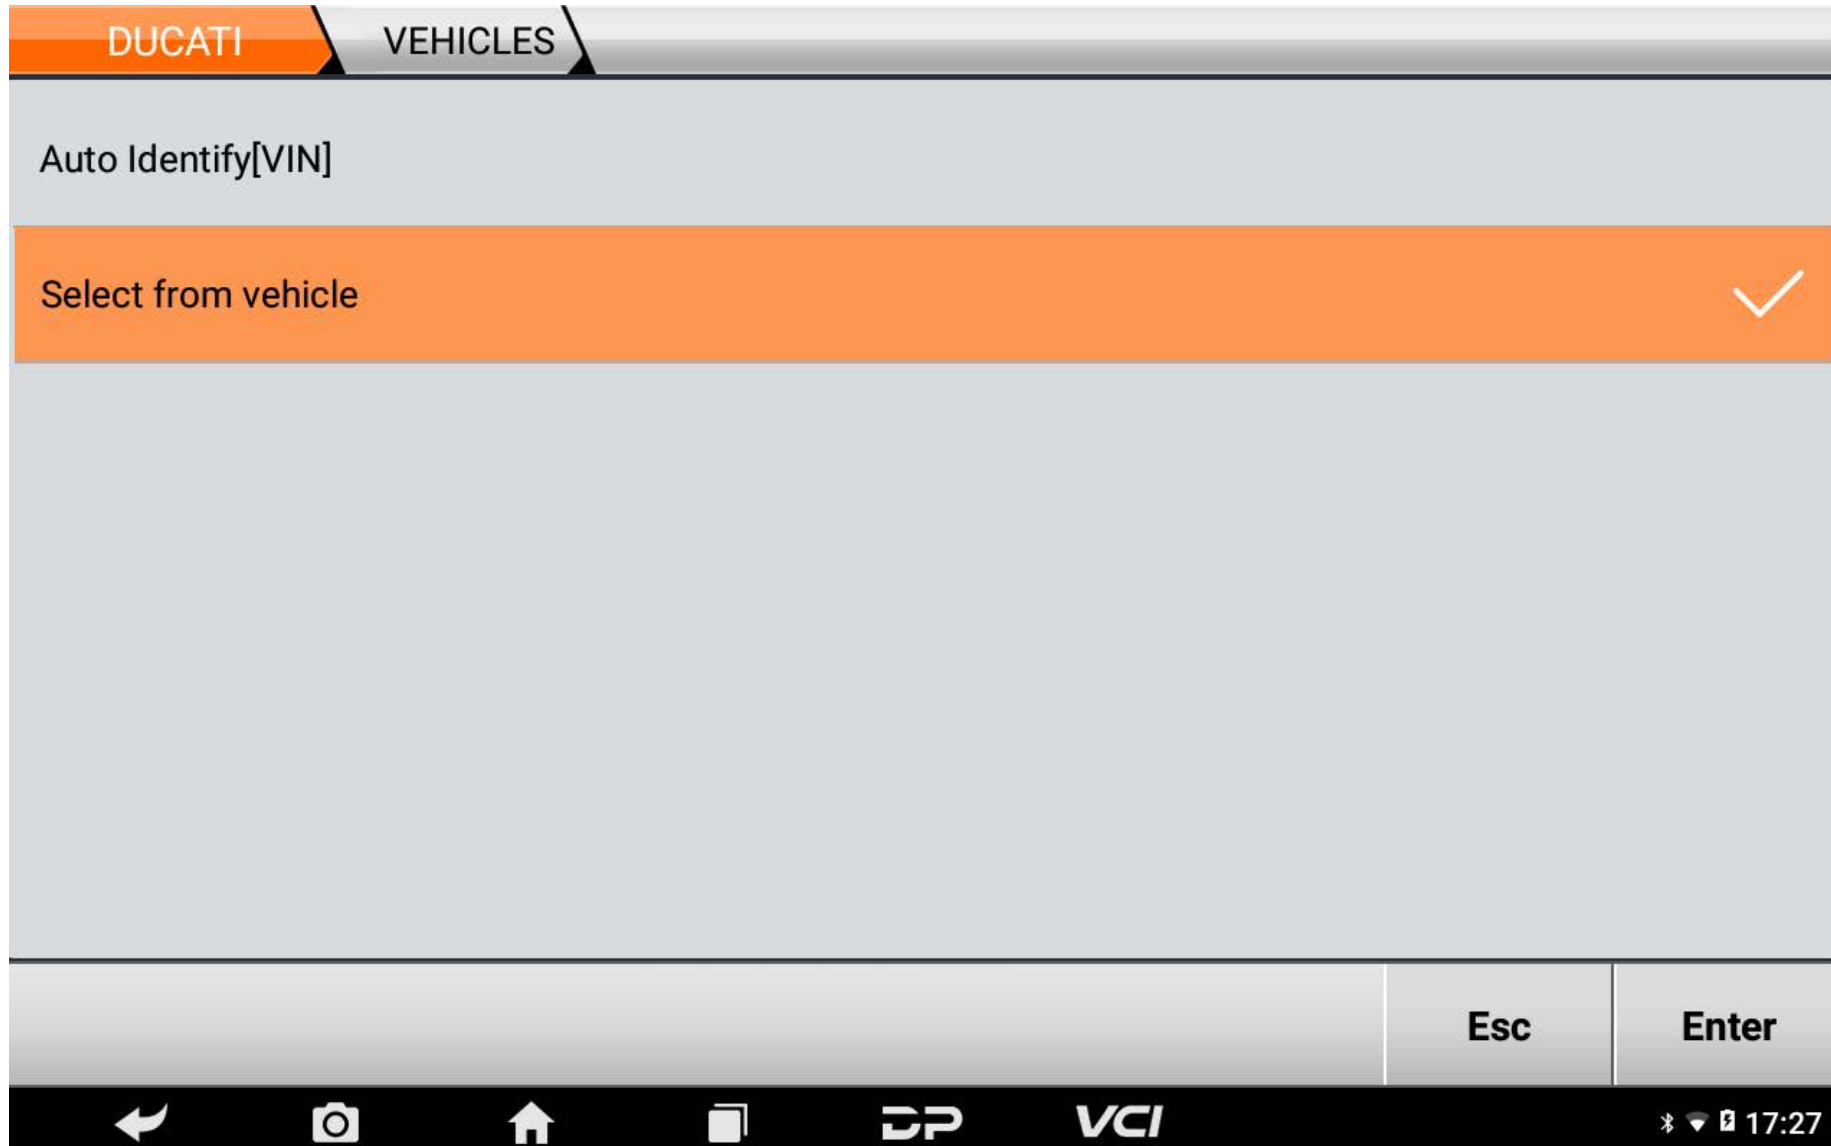

②Click **[M]** - **[Multistrada 1200]** - **[Motorcycle (Road) | (2015-2016) ]**

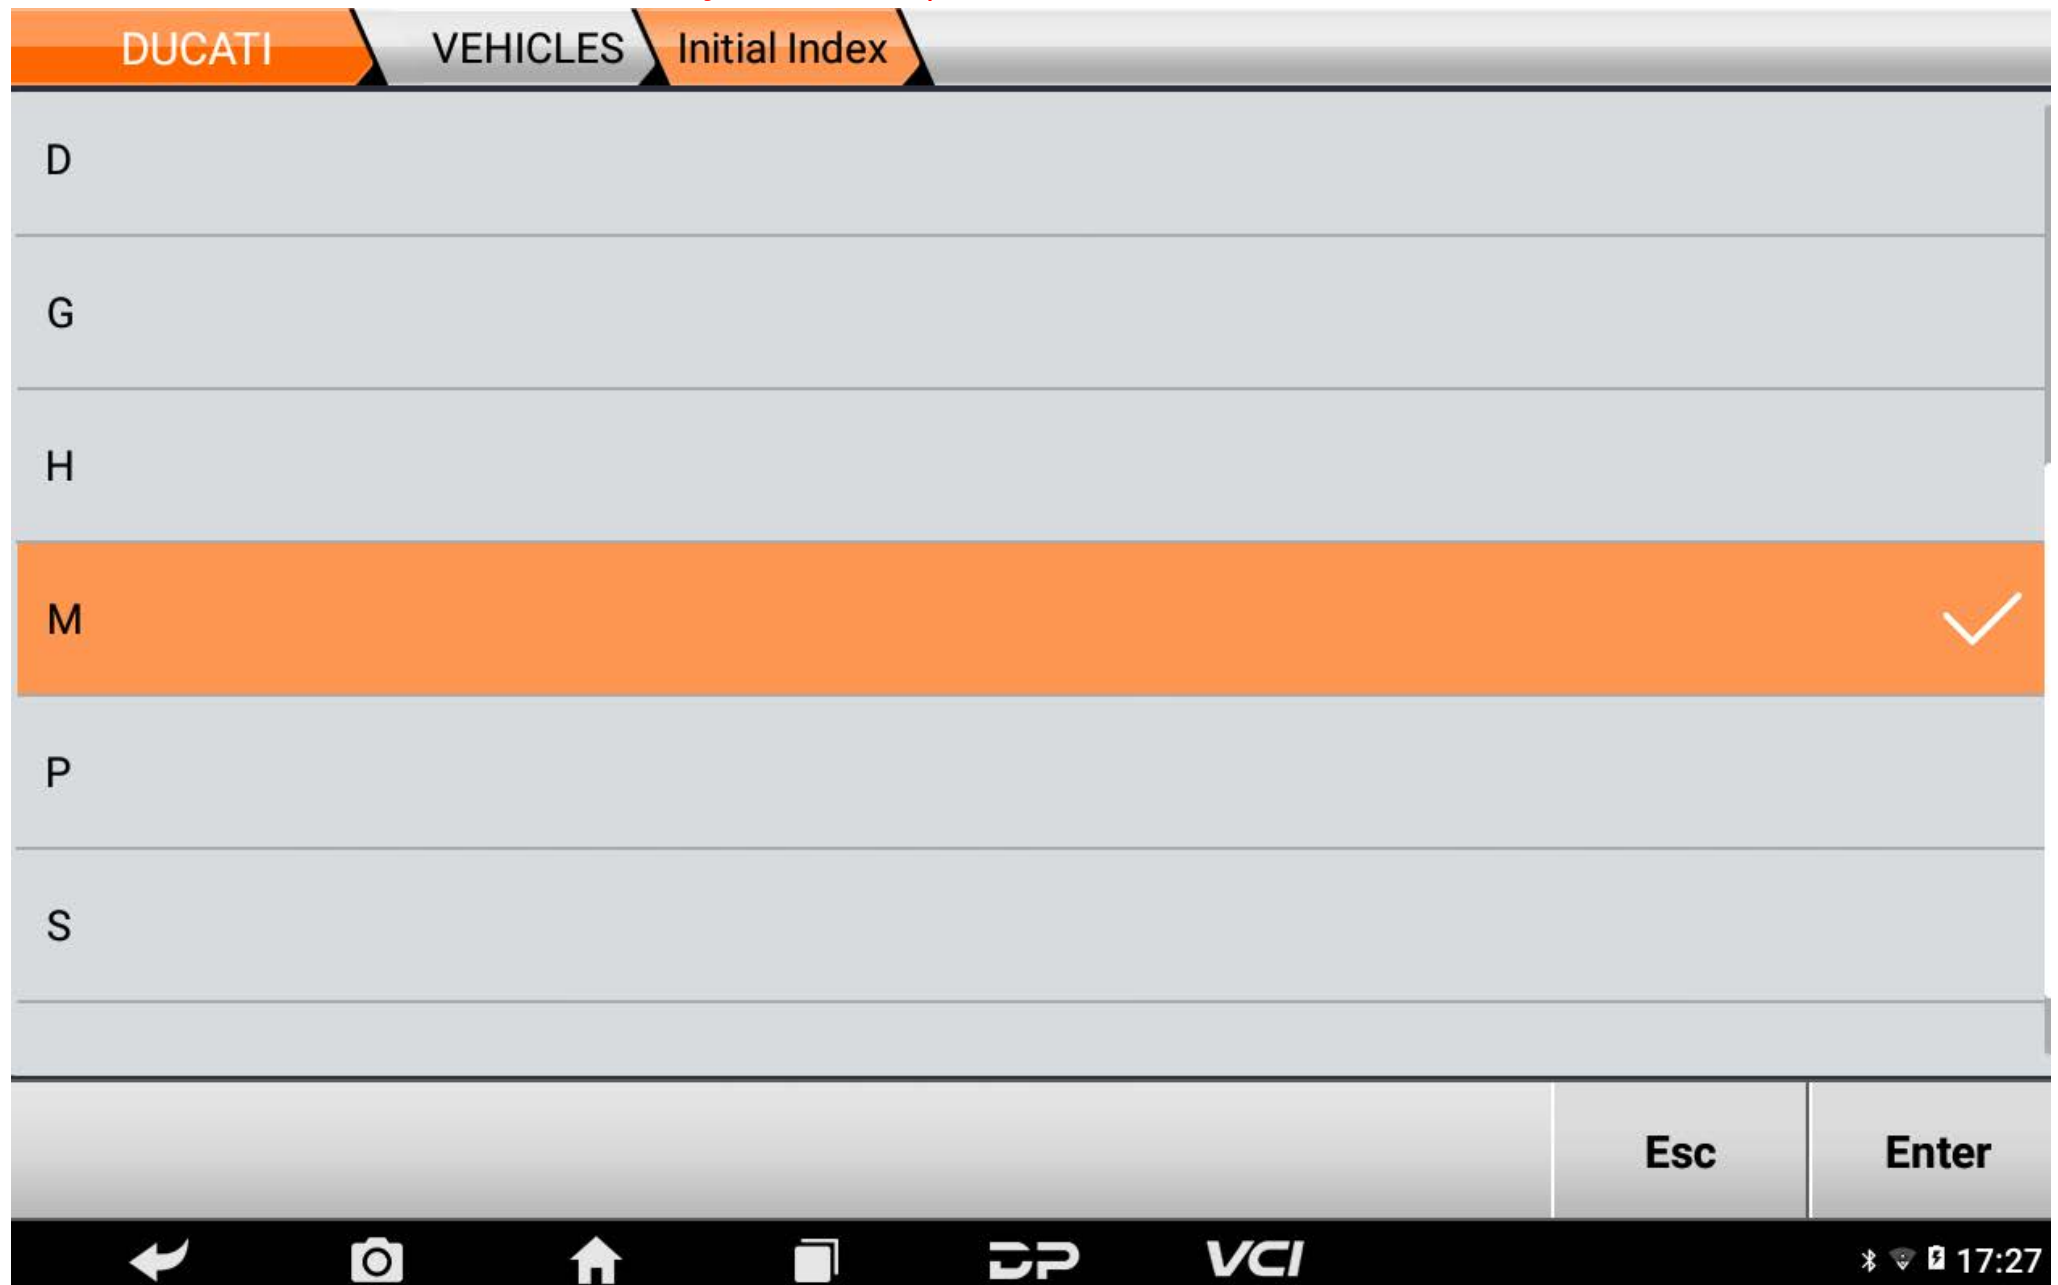

DUCATI

VEHICLES

Initial Index

Select from vehicle

Multistrada 1000 '05

Multistrada 1100 '07-'09

Multistrada 1100 S '07-'09

Multistrada 1200



Multistrada 1200 (BRAZIL)

Multistrada 1200 ABS


Multistrada 1200 D-Air

Esc


Enter



17:27

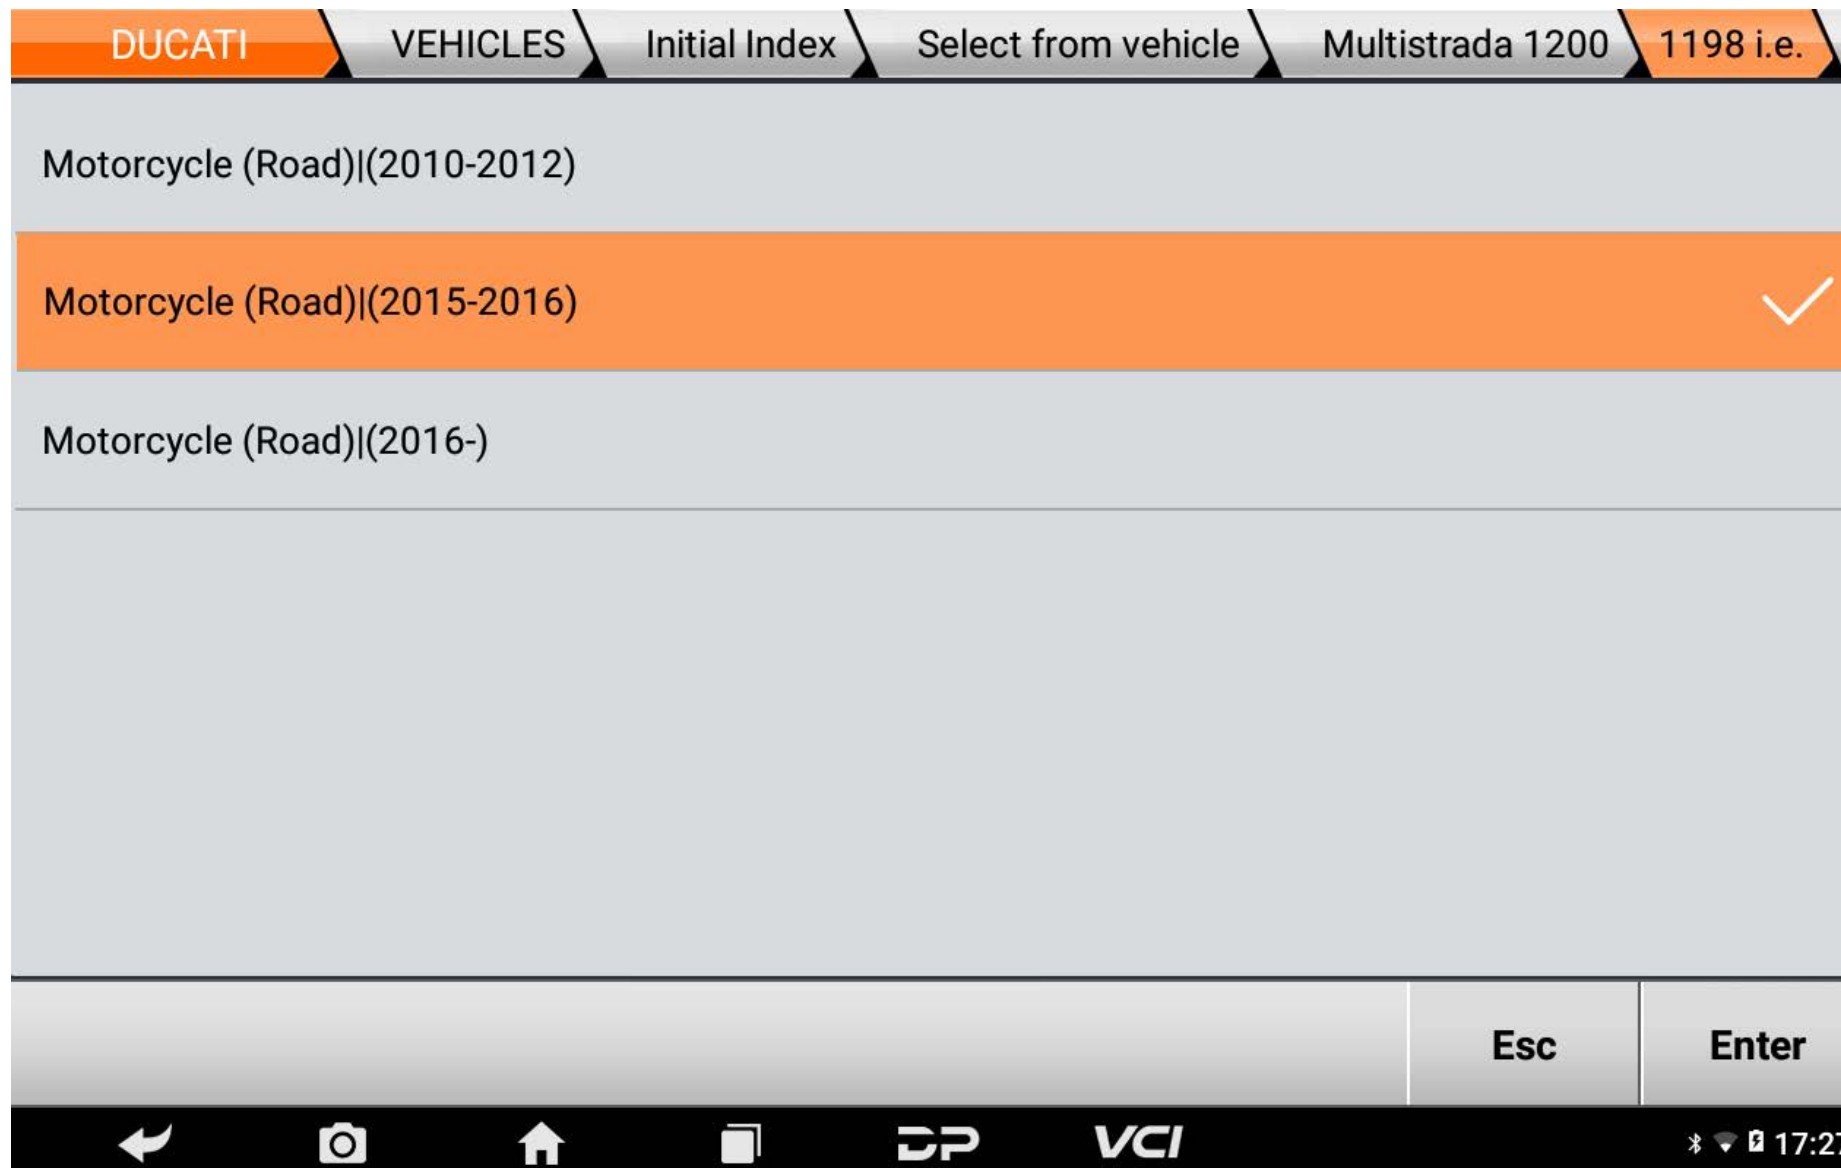

③Click **【Service system (Service Lamp Reset) 】** ;

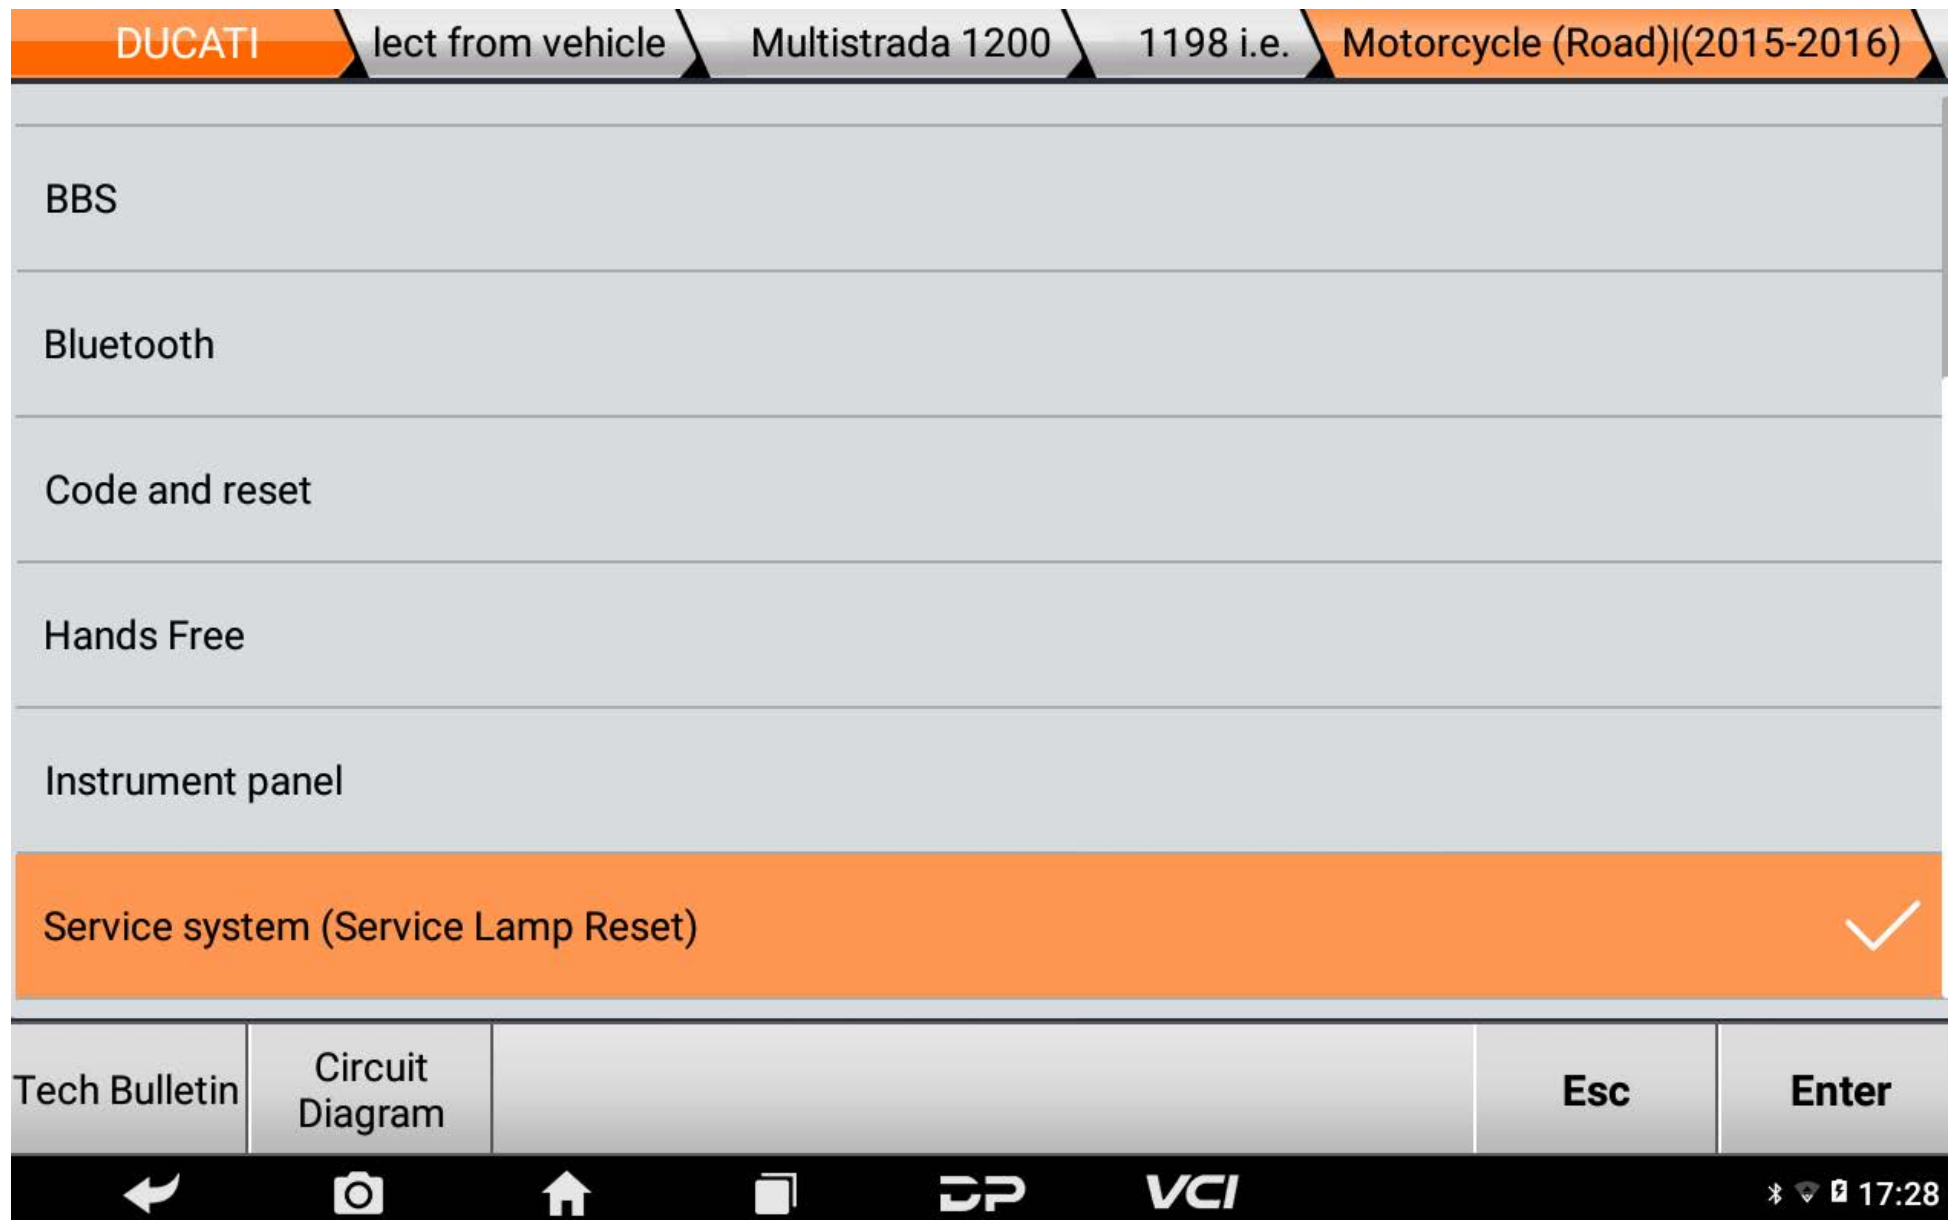

④Click **【Diag Socket】** or **【Diag Connector】** to check the diag socket location or the diag cable information, connect diag cable, click **【Enter】** ;

DUCATI

1198 i.e.

Motorcycle (Road)|(2015-2016)

Service system (Service Lamp Reset)

(2015-2016) Service function



Diag Socket

Diag  
Connector


Esc

Enter



\* 17:28

- Left side
- Right side

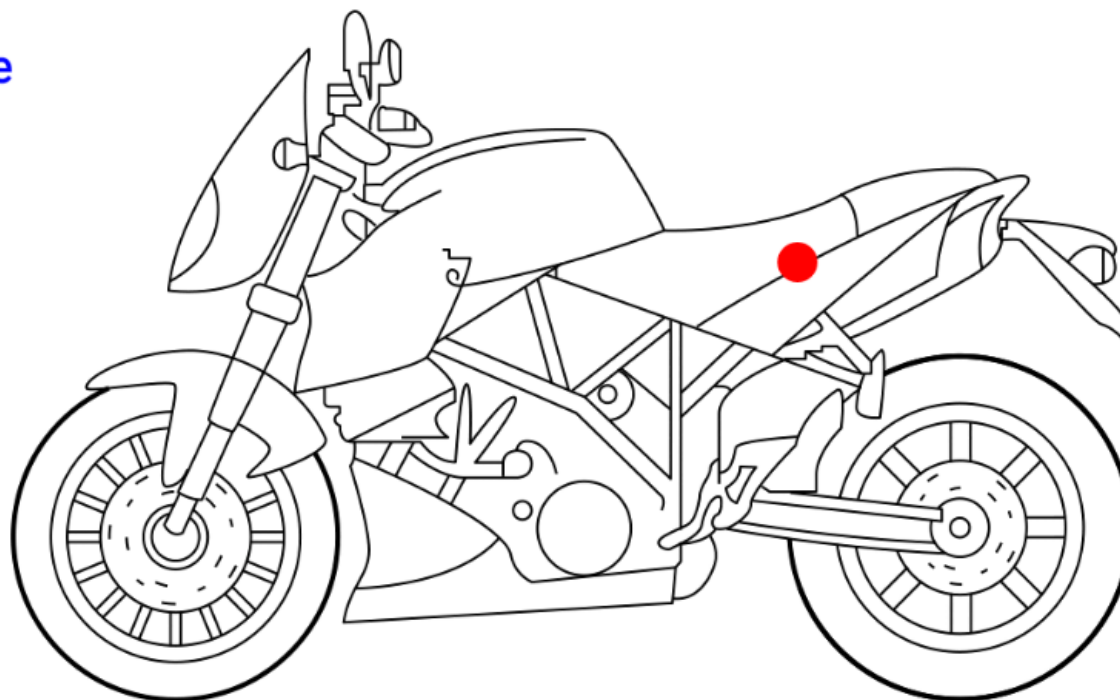

Diag Socket



Diag  
Connector

Esc




\* 17:28



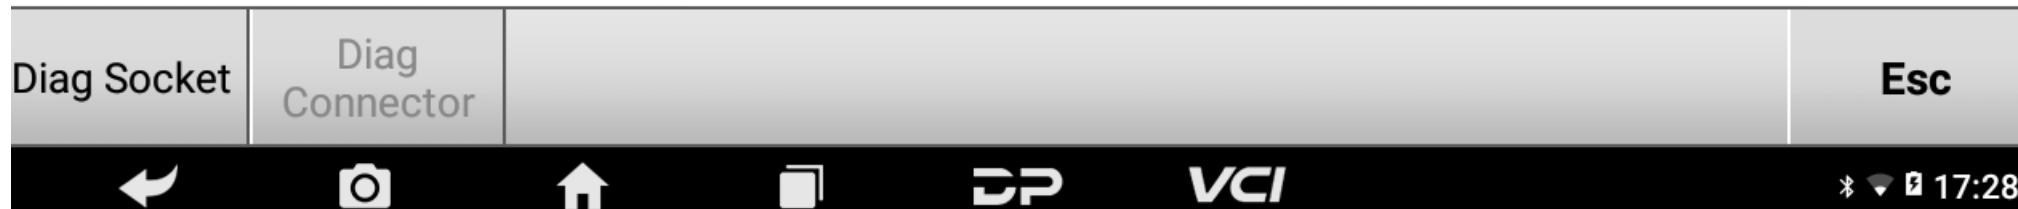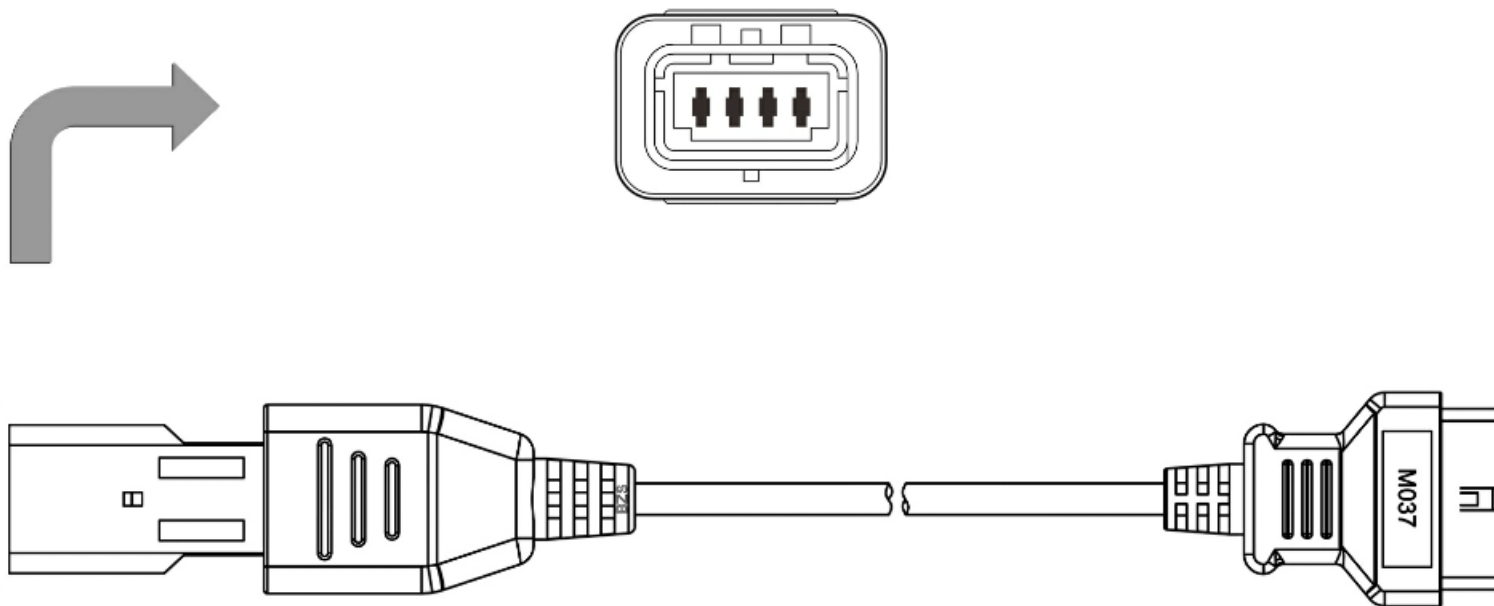

⑤click **Special Function** ;

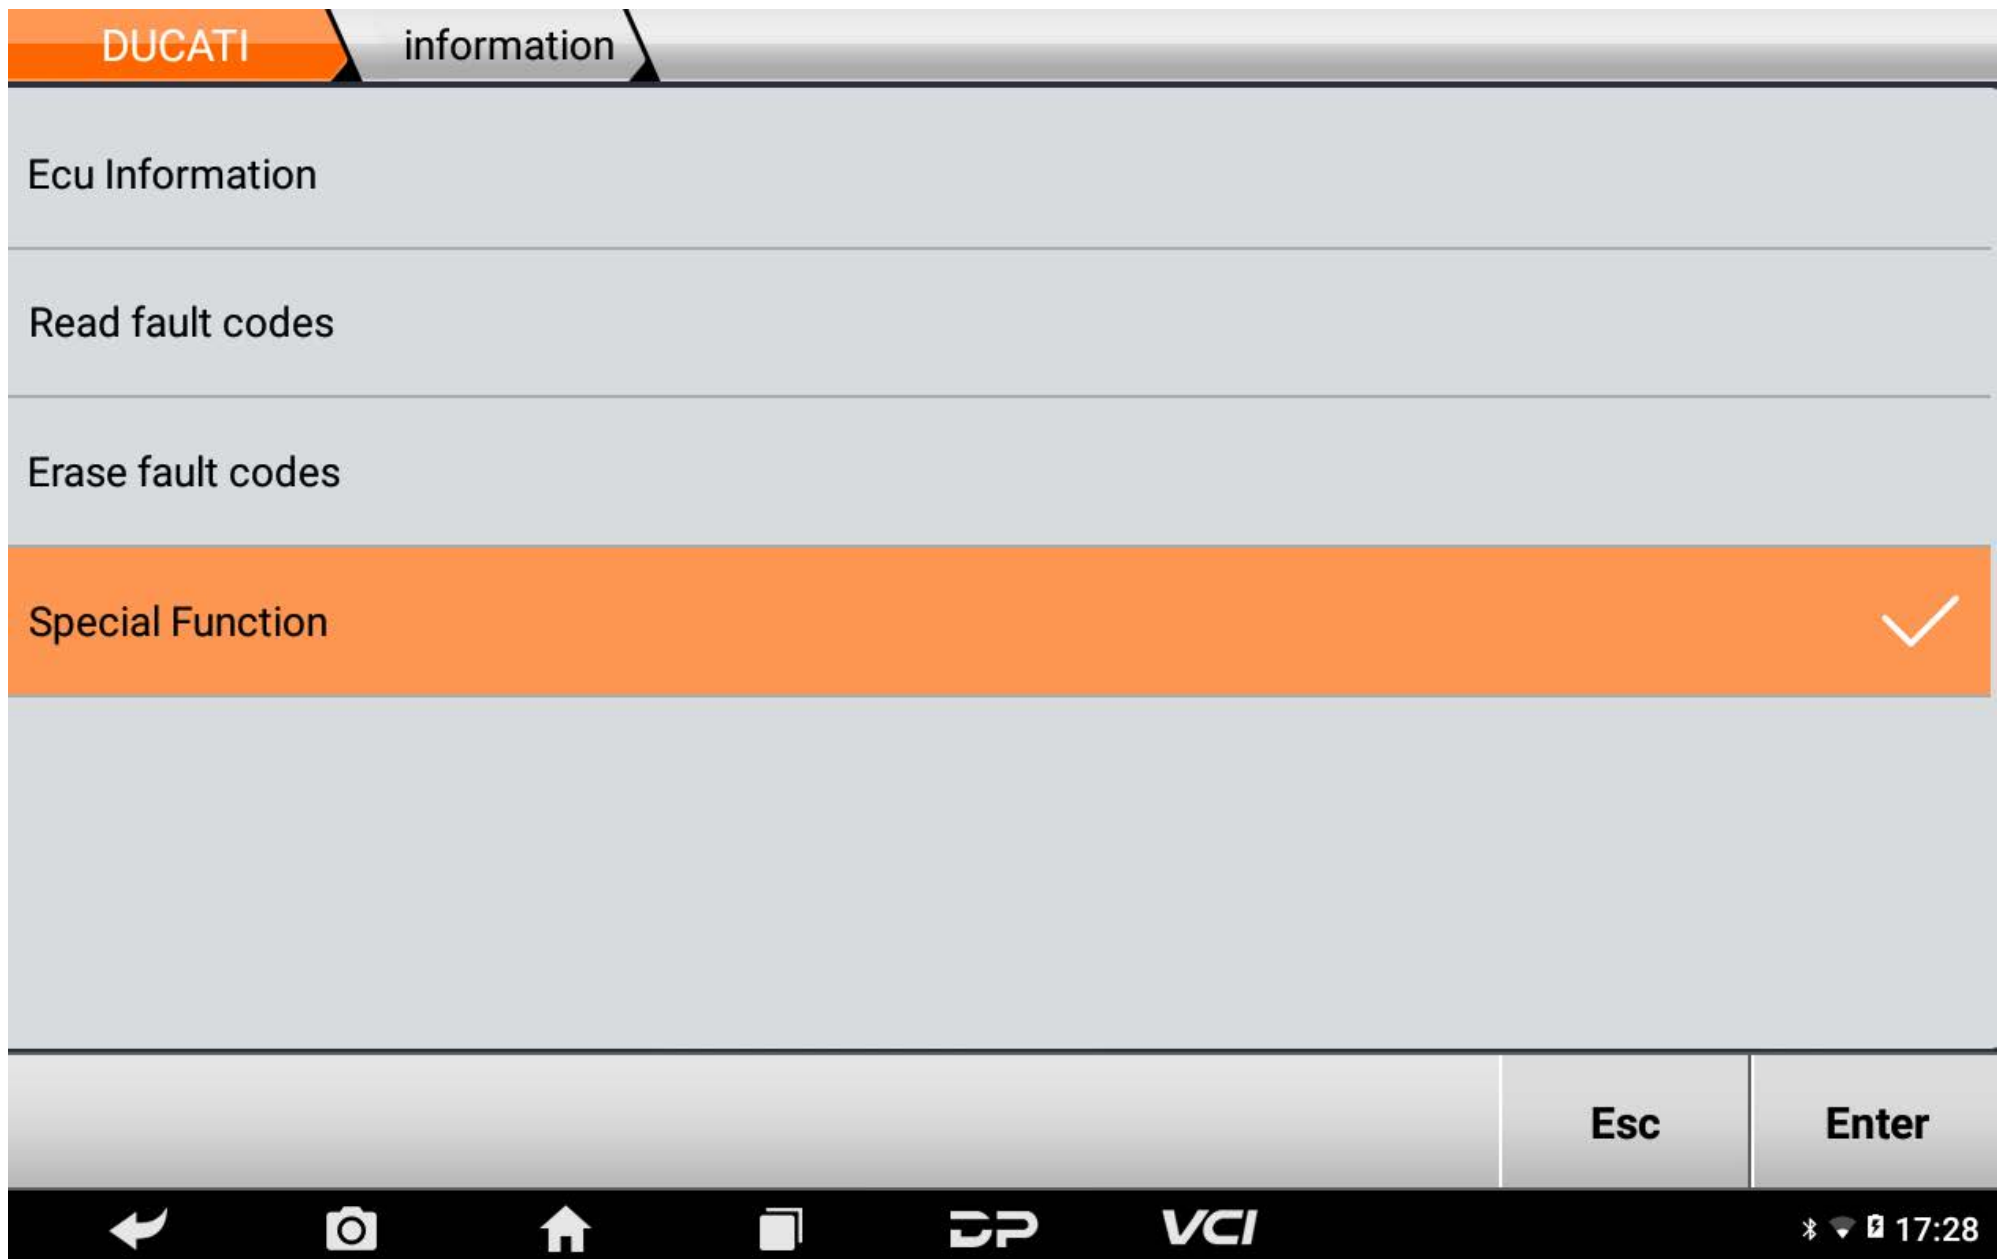

⑥Read the Note, click **【Agree】** ;

## Note:

1. Some adjustments or settings may cause vehicle failure, therefore our company does not assume any responsibility
2. It is recommended to refer to the original maintenance data for operation.

Agree


Esc




⑦Enter the code 123, click **Enter** ;

Password 123, please



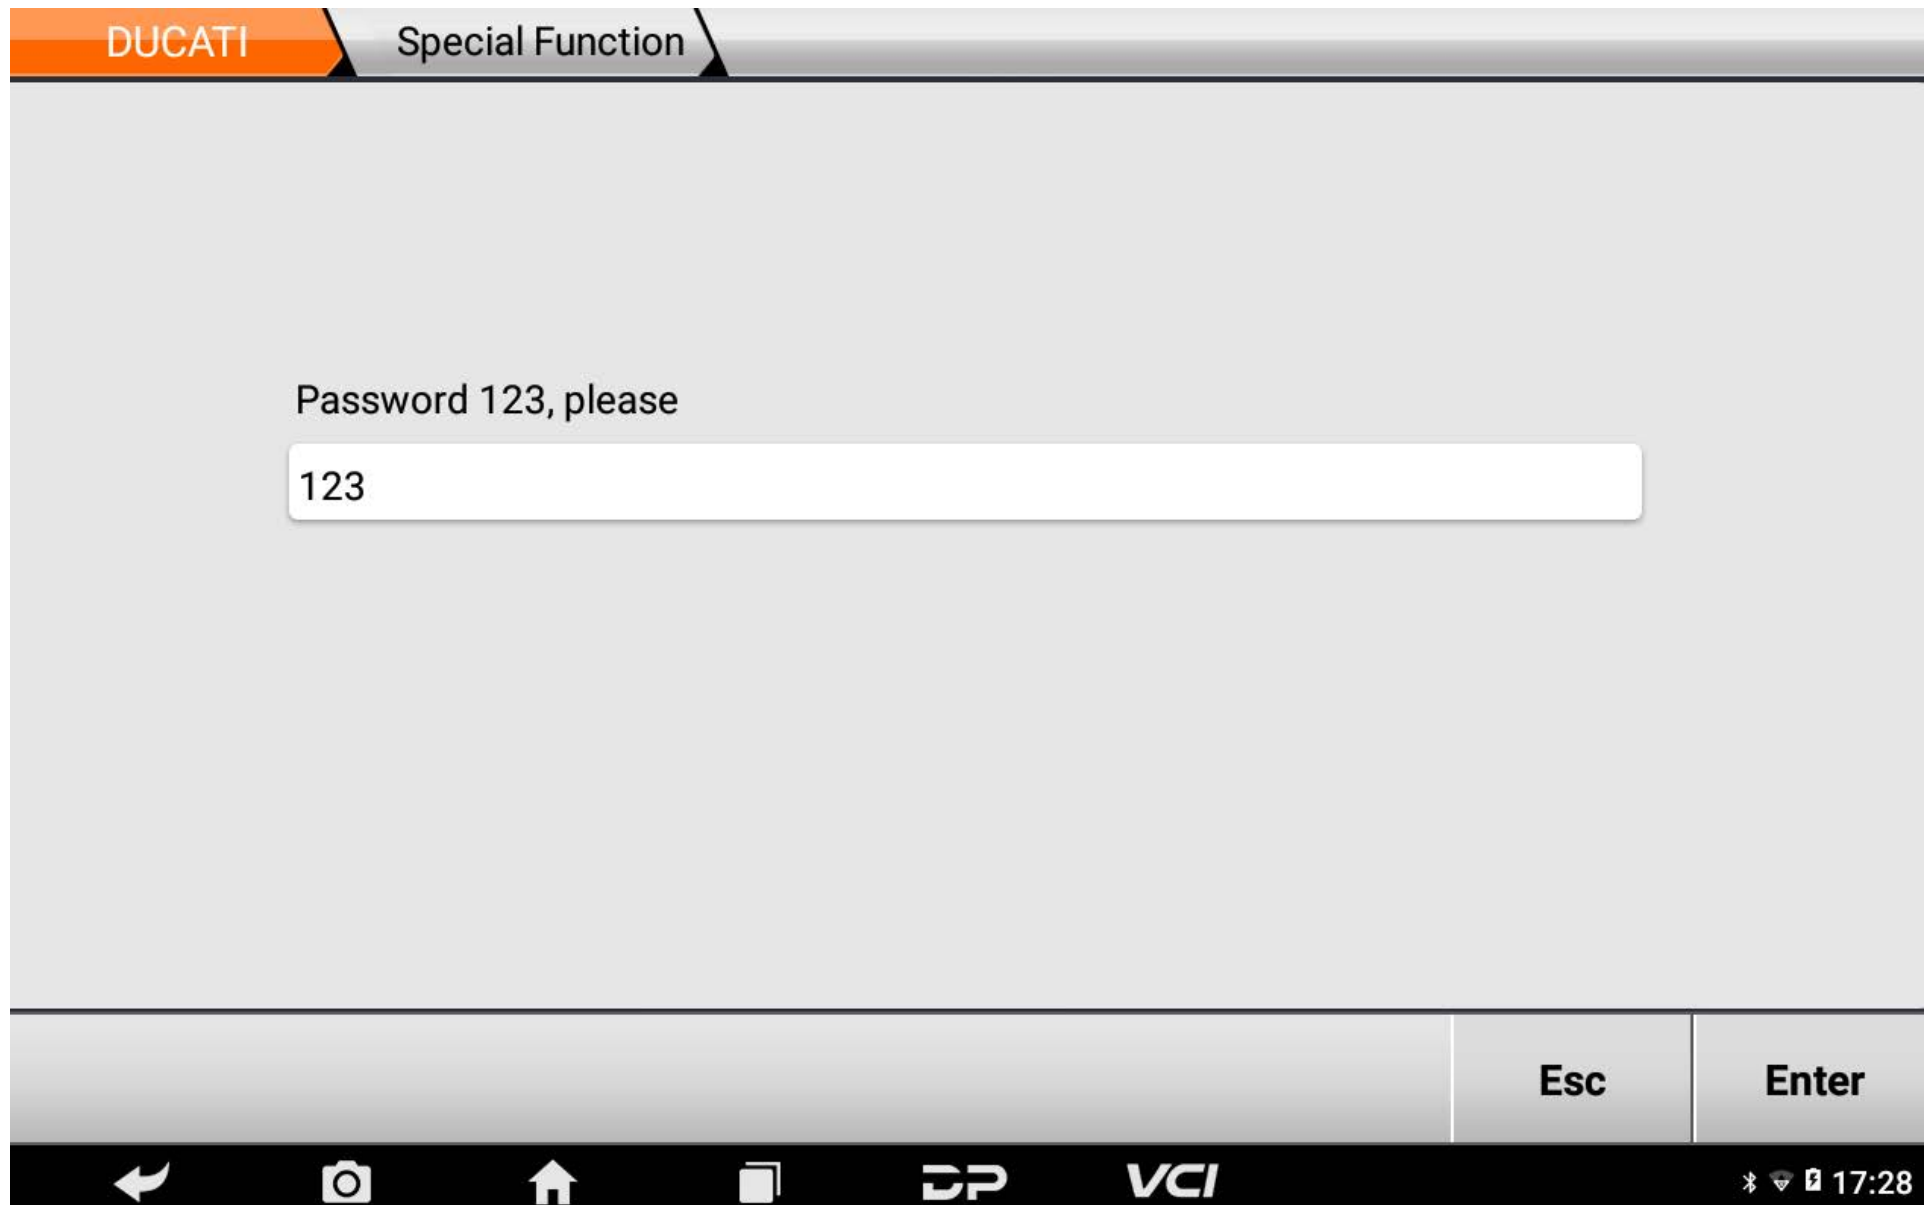

⑧Click **【Annual service warning light deactivation】** ;

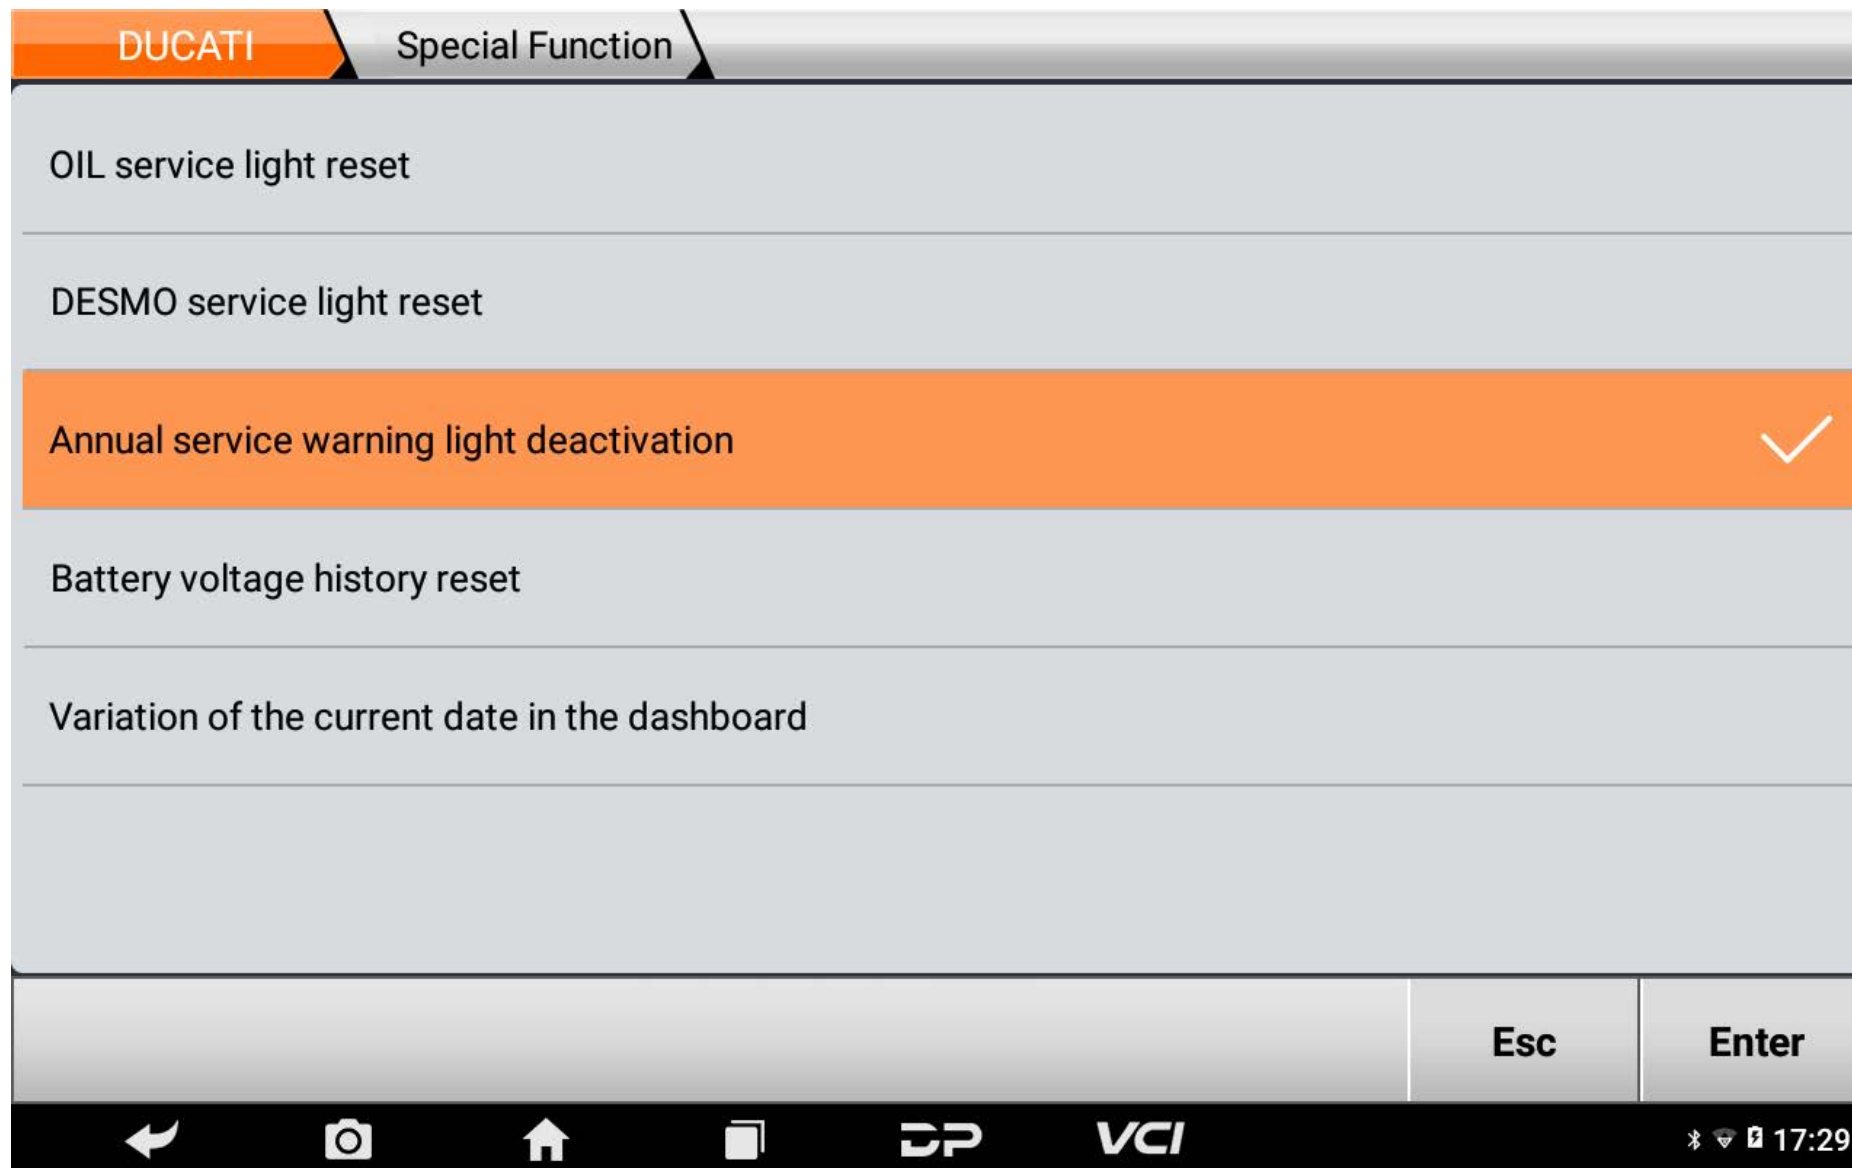

⑨Click **【Enter】** , follow the tips to operate;

Press Enter to continue or Esc to end

Esc

Enter



Service warning light deactivation after the related time and/or mileage service.

Enter



⑩Enter the next maintenance date in the format of year, month, and day, such as 220315, click **Enter** ;



New expiration date that will be stored for the annual service.

Enter the correct expiration date in the format yy/mm/dd:\*\*/\*\*/\*\*

220315



New expiration date that will be stored for the annual service.

Enter the correct expiration date in the format yy/mm/dd:\*\*/\*\*/\*\*

Esc

Enter



DUCATI

Information


Input Value:220315

Esc

Enter



17:29

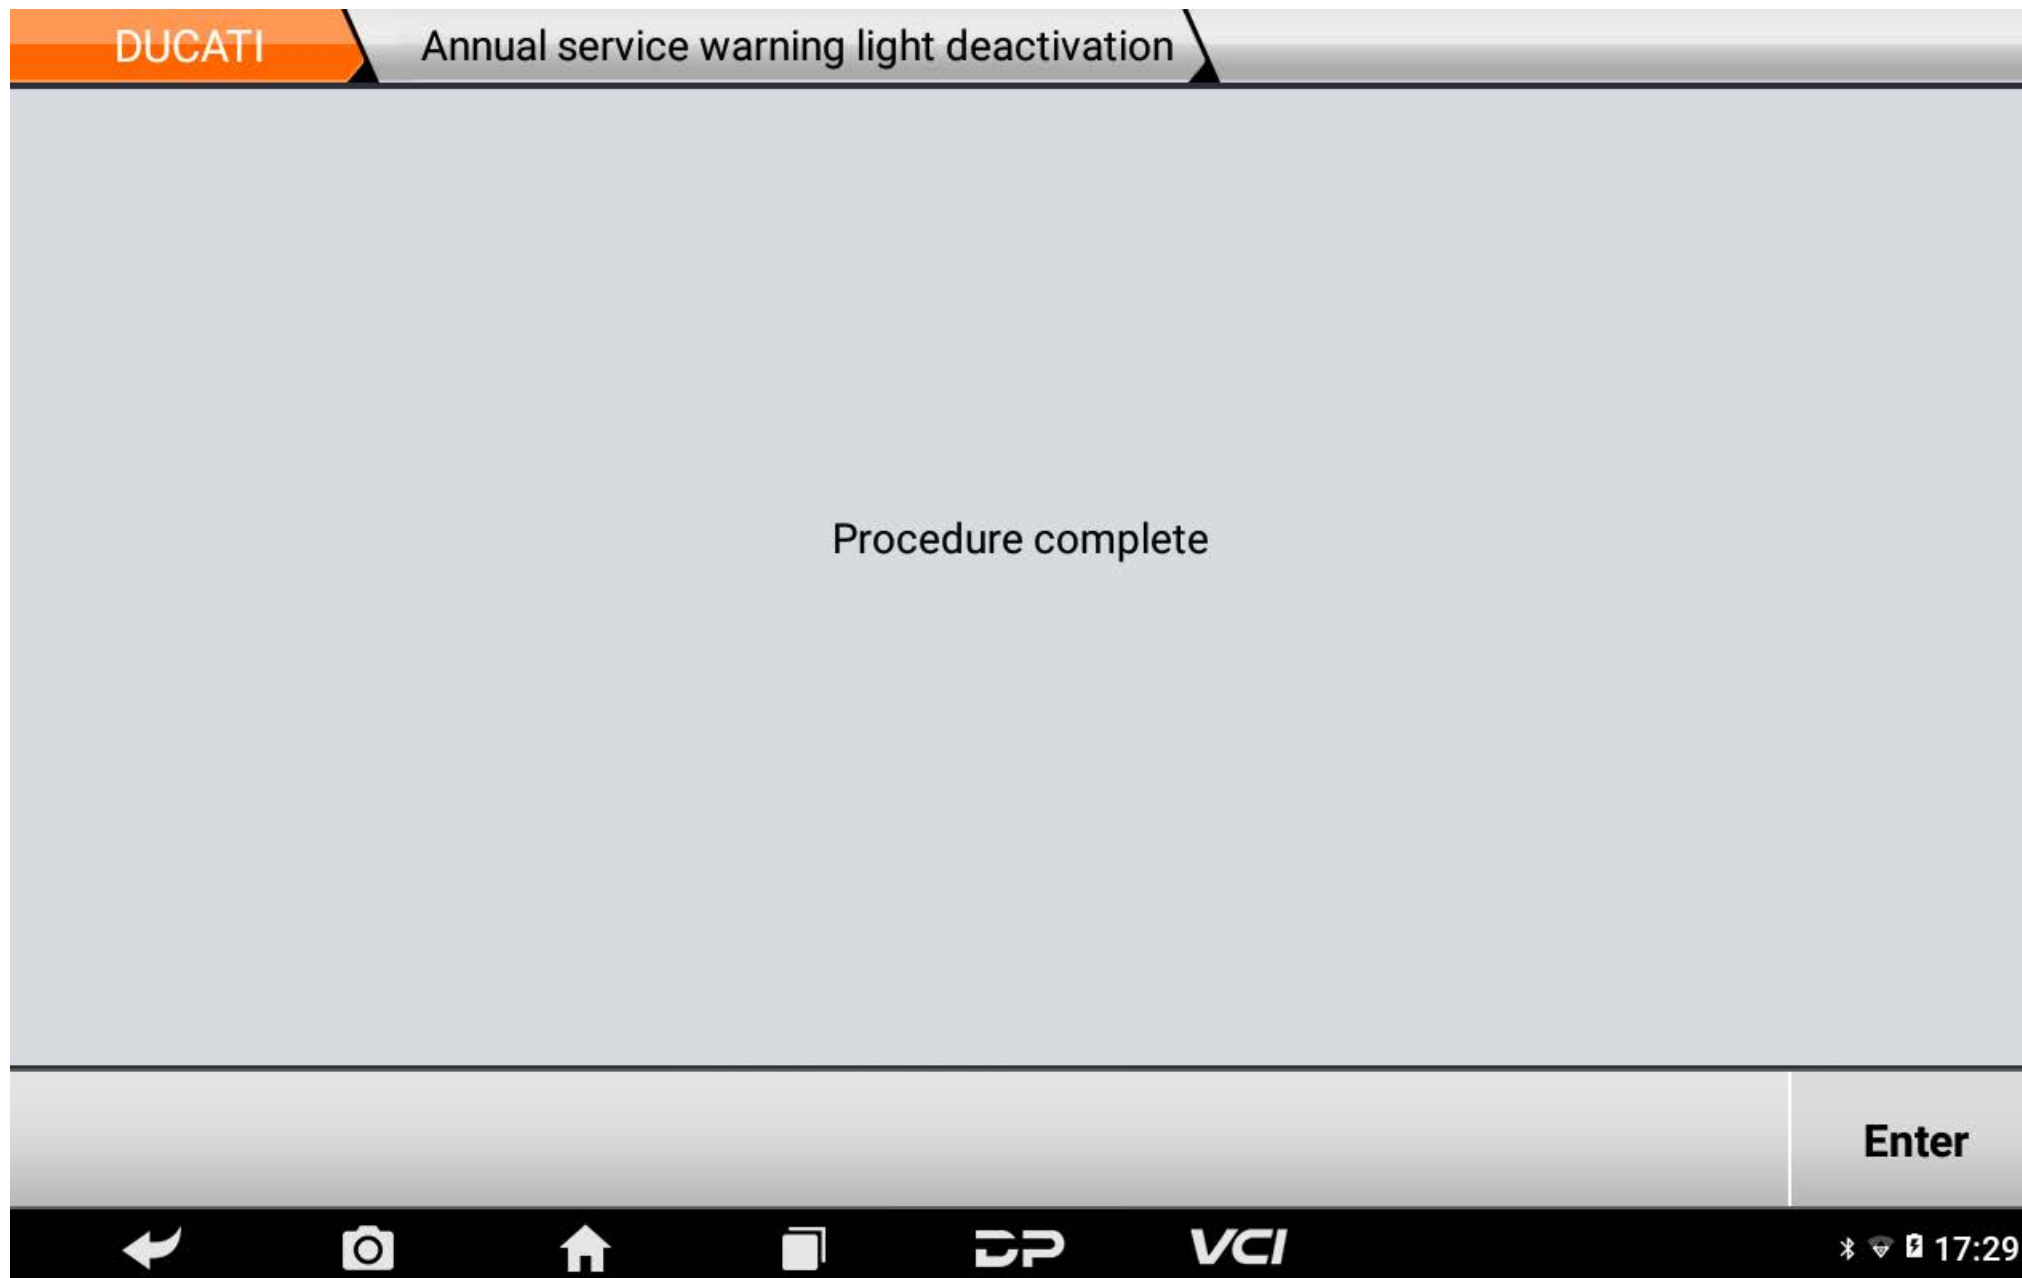

⑪ After complete the operations, Maintenance reminder eliminated



### Summary

- During the operation, pls strictly follow the equipment tips and enter the next maintenance date in the format of year, month, and day;
- If you don't know where the diagnostic socket is, you can enter the **【Select from vehicle】** menu, select the correct model, and view the information on the **【Diag Socket】** and **【Diag Connector】**
- If the device is correctly connected to the vehicle, click **【Automatic Identify [VIN]】** to automatically enter the motorcycle model menu without manually selecting.